


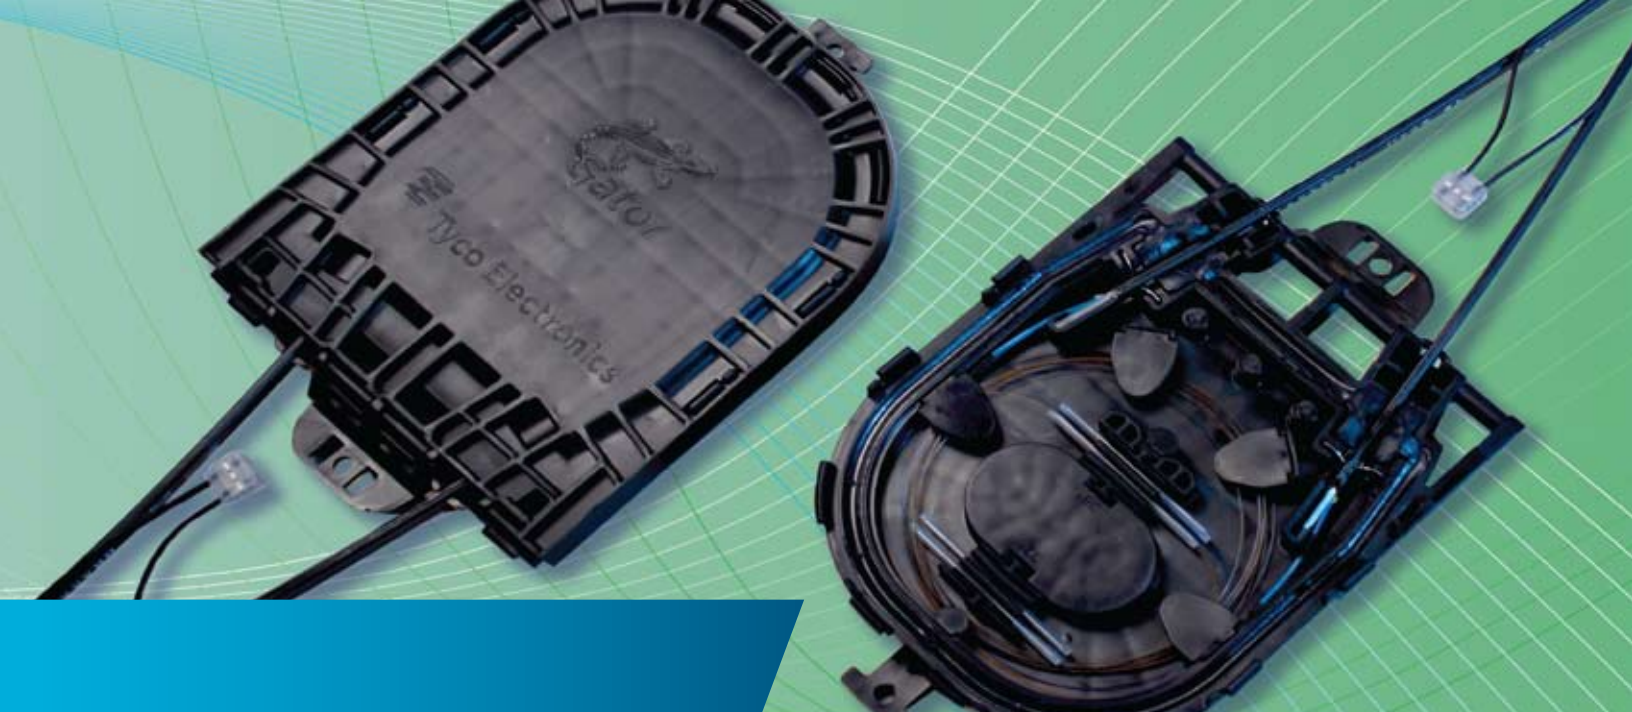

Gator 12F

Splice Closure

Features and Benefits

- Compatible with most flat drop cable types
- Accommodates up to 12 single fibers, 12 ribbonized fibers, or one 12 fiber ribbon
- Gel sealing
- Toning wire hardware included
- Small size: 7.5" x 5.8" x 1.2" thick
- Two mounting tabs are integrated into the closure base to allow easy mounting
- Re-enterable but not re-usable

The Gator splice closure incorporates our unique cable hold down and strength member termination features and is capable of holding either fusion or mechanical splices. Simple closing of the lid and base creates a sealed closure system. No separate grommets, mixing of chemicals, or tools are required. Tone wires can also be terminated outside of the closure using the included hardware.

The Gator splice closure is a small butt splice closure primarily designed for splicing two loose tube "flat drop" style cables of 1 to 12 fibers in above ground, below grade, and direct buried applications. This splice closure uses Tyco Electronics' well accepted gel sealing technology to create a sealed closure system that will fit into confined areas such as small "flowerpot" style handholes.

Selection Guide

Product Descriptor	Package	Part Number	Item Description	Product Dimensions
Gator 12F splice closure	10/pk	MR3919-000	FDSC-GATOR-12F-T	7.5" x 5.8" x 1.2"

Accessories

Product Descriptor	Package	Part Number	Item Description
Tone Wire Connector	100/pk	Z65949-000	TEL SPLICE ASSY, 3W

				Fiber Type
Splice Protection Sleeves				
62 mm length	100/pk	693979-000	SMOUV-1120-01-US	Single
45 mm length	100/pk	143339-000	SMOUV-1120-02-US	Single
47 mm length	50/pk	888498-000	SMOUV-1120-R2/12-US	Ribbon

Tyco Electronics Corporation
8000 Purfoy Road
Fuquay Varina, NC 27526-9349
Tel 919-557 8900
Fax 919-557 8498
www.tycoelectronics.com
www.telecomosp.com

Gator, SMOUV, TE logo, and Tyco Electronics are trademarks.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, Tyco Electronics Corporation makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Tyco Electronics' obligations shall only be as set forth in Tyco Electronics' Standard Terms and Conditions of Sale for this product and in no case will Tyco Electronics be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of Tyco Electronics products should make their own evaluation to determine the suitability of each such product for the specific application.